

# Smart Home subscription



With the Smart Home subscription you can:

- Set a rate for guest usage
- Manage a whitelist
- Reset the charge point if necessary

Have you received log in details from us before because you use a mobility card from us? Then you can log in with your credentials via <https://my.e-flux.nl/co/customer>.

By clicking on "**My Mobility**" you will be taken to the Mobility Portal. In here you will find all the charging sessions that are registered on the mobility cards. For example, charging sessions at public charging stations.



Click on '**My Charging Points**' to go to the Charge Point Portal. Here you can find all the charging sessions that are registered on the charging points.



## Set your own charge rate

Do you want to put the charging station public for use by others? Then a kWh rate can be set as reimbursement for the electricity costs. You can find the reimbursement invoice under Account > Income.

## Manage a whitelist

If you want to be the only one that can start a charging session, you can put your charge card on the whitelist. The charging sessions are registered at a zero rate.

## Contact details

www.e-flux.nl – 020 763 0620

Pedro de Medinalaan 17, 1086 XP, Amsterdam, Nederland

Feel Free!

## Set rate


1. Go to charging station
2. Click on **Pricing**
3. Click on **Edit Pricing**
4. Enter a rate and click on **Set pricing policy**.
5. Check '**Publicly available**' under devices > configuration



Charging points					
#	Station rank	Socket type	Power type	Fixed cable	Publicly available
1	Charging point 1	Type 2	3 x 32A (230V)	<input type="checkbox"/>	<input checked="" type="checkbox"/>

## Manage the whitelist

1. Set the rate first
2. Go to charging station
3. Click on **sessions**
4. Click on the mobility card icon
5. Give a description and add the pass

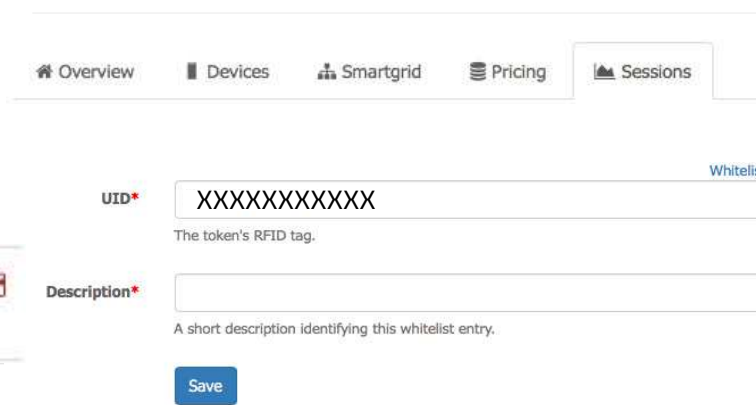

Overview Devices Smartgrid Pricing **Sessions**

Whitelist

UID\* XXXXXXXXXXXX  
The token's RFID tag.

Description\*  
A short description identifying this whitelist entry.


Save

1:15:02	4.25 kWh	€0.00	e-clearing.net
---------	----------	-------	----------------

## Reset charging station

1. Go to charging station
2. Go to **Devices**
3. Click on the serial number of the charging station
4. Click on **Operation**
5. Click on **Hard reset**

The charging station will restart. Try to remove the charging cable once again.

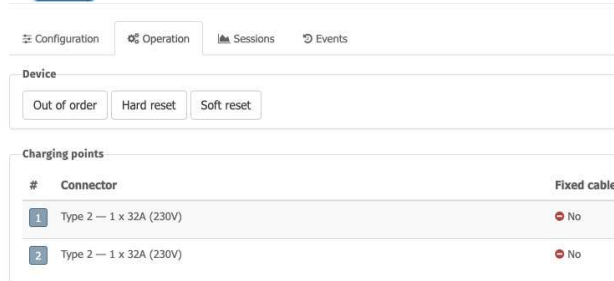

Configuration **Operation** Sessions Events

Device

Out of order Hard reset Soft reset

Charging points

#	Connector	Fixed cable
1	Type 2 — 1 x 32A (230V)	No
2	Type 2 — 1 x 32A (230V)	No

**Do not forget to enter your bank account information in your account settings for reimbursement.**

**We transfer the reimbursement for the charging sessions to this account number.**

## Contact details

www.e-flux.nl – 020 763 0620

Pedro de Medinalaan 17, 1086 XP, Amsterdam, Nederland

Feel Free!